

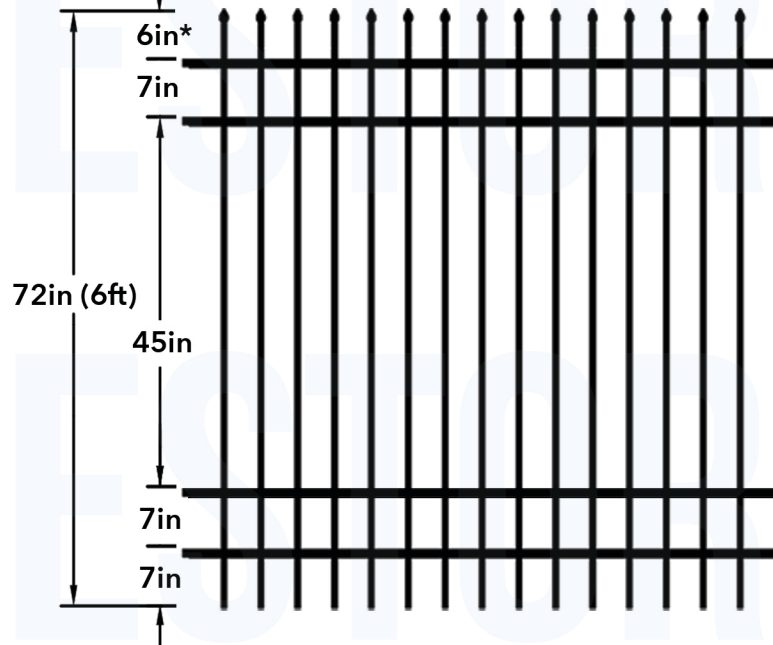



All Panels Are 72in (6ft) Wide

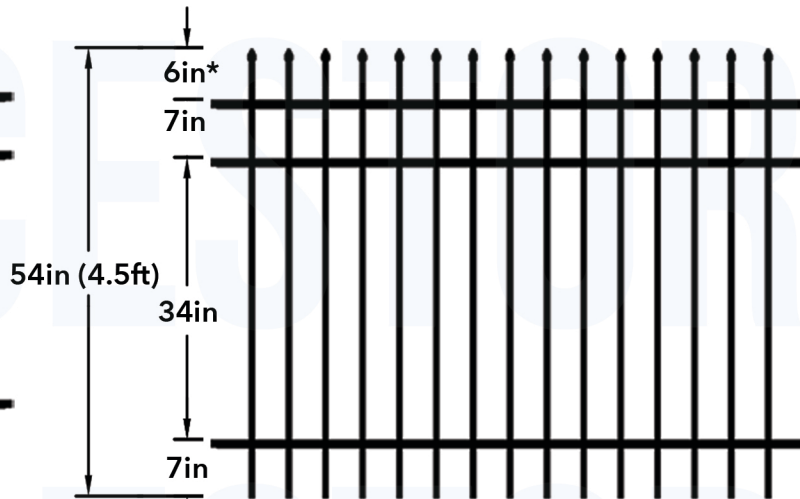

Picket Spacing



Standard: 3-13/16in Gap



Double: 1-5/8in Gap

ICC Swimming Pool
Code Approved
Heights

Standard Picket Spacing:

60in Flush Bottom, 72in

Double Picket Spacing

48in, 54in, 60in, 72in

Check local codes before
purchasing.

SPEAR POINT TOP - RESIDENTIAL GRADE ALUMINUM FENCE PANELS

Picket & Rail Material: 6063-T5 Aluminum

Coating: AAMA 2604 Approved Polyester Powder Coat

Pickets: 5/8in Sq. x 0.050in Wall **Rails:** 1in Sq. x 0.055in Wall

Screws: 410 Hardened Stainless Steel With Cr6 Plating

Panels can rack 20in over the 6ft span for installations on hills.

* Spear point length from top rail may vary by 1/2in.

ONLINE FENCESTORE.COM
YOUR ONLINE SOURCE FOR FENCING, GATES & HARDWARE

All Information Contained is Copyright ©
OnlineFenceStore.com. All Rights Reserved.

DRAWING NO. OFS-AL-RSPT

REV NO. PLREV23

REV DATE 07/11/23