




All Panels Are 72in (6ft) Wide

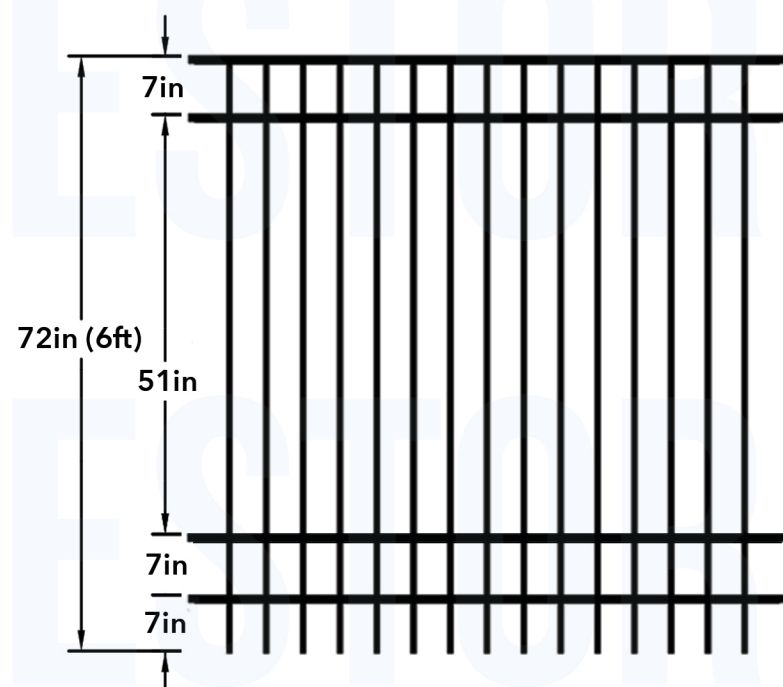

Picket Spacing

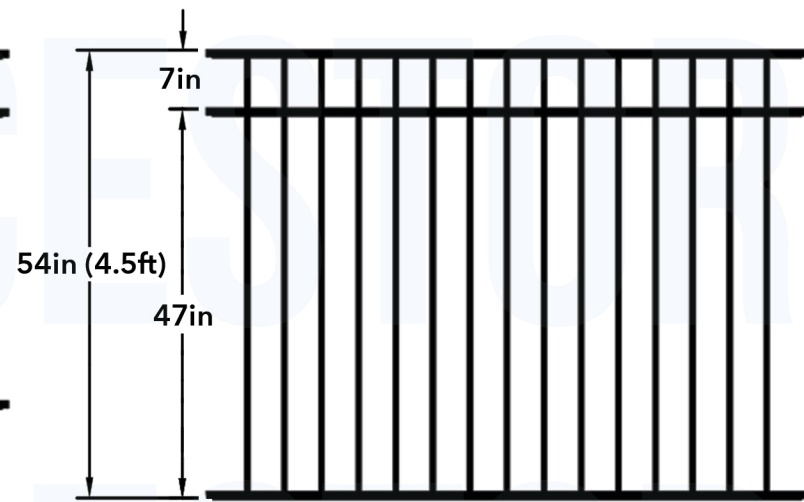

Standard: 3-13/16in Gap



Double: 1-5/8in Gap

ICC Swimming Pool Code Approved Heights

Standard Picket Spacing:
54in Flush Bottom, 60in, 72in
Double Picket Spacing
48in, 54in, 60in, 72in
Check local codes before purchasing.

SMOOTH TOP - RESIDENTIAL GRADE ALUMINUM FENCE PANELS

Picket & Rail Material: 6063-T5 Aluminum
Coating: AAMA 2604 Approved Polyester Powder Coat
Pickets: 5/8in Sq. x 0.050in Wall **Rails:** 1in Sq. x 0.055in Wall
Screws: 410 Hardened Stainless Steel With Cr6 Plating
 Panels can rack 20in over the 6ft span for installations on hills.



All Information Contained is Copyright © OnlineFenceStore.com. All Rights Reserved.

DRAWING NO. OFS-AL-RST	
REV NO.	REV DATE