




STYLES



Spear Point

Available Heights
36in, 48in, 54in, 60in, 72in




Smooth

Available Heights
36in, 48in, 54in, 60in, 72in



Smooth Spear Point

Available Heights
36in, 48in, 54in, 60in, 72in



Staggered Spear Point

Available Heights
36in, 48in, 54in, 60in, 72in



Two Rail Smooth

Available Heights
36in, 48in, 54in


GATE TOP OPTIONS



Flat Top



Arch Top

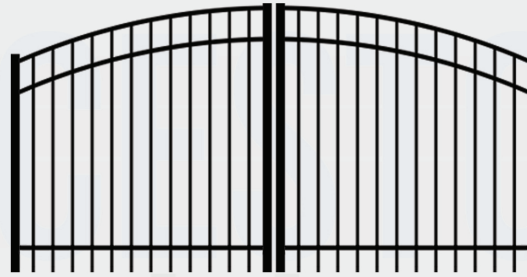


Rainbow Arch Top - Double Gates




Bell Estate Arch Top - Double Gates

HEIGHTS



72in (6ft)



60in (5ft)



54in (4.5ft)



48in (4ft)



36in (3ft)

ICC POOL CODE APPROVED HEIGHTS



Spear & Staggered Spear Point

Standard Picket Spacing: 60in Flush Bottom, 72in
Double Picket Spacing: 48in, 54in, 60in Flush Bottom, 72in

Smooth & Smooth Spear Point

Standard Picket Spacing: 54in Flush Bottom, 60in, 72in
Double Picket Spacing: 48in, 54in Flush Bottom, 60in, 72in

Two Rail Smooth

Standard Picket Spacing: 48in, 54in
Double Picket Spacing: 48in, 54in

Check Local Codes Before Purchasing.

SPECIFICATIONS

Picket & Rail Material: 6063-T5 Aluminum

Coating: AAMA 2604 Approved Polyester Powder Coat

Pickets: 5/8in Sq. x 0.050in Wall **Rails:** 1in Sq. x 0.055in Wall

Panel Screws: 410 Hardened Stainless Steel With Cr6 Plating

Gates: Welded Construction

Panels can rack 20in over the 6ft span for installations on hills.

AVAILABLE PICKET SPACING



Standard

3-13/16in Gap



Double

1-5/8in Gap

