






### Available Heights

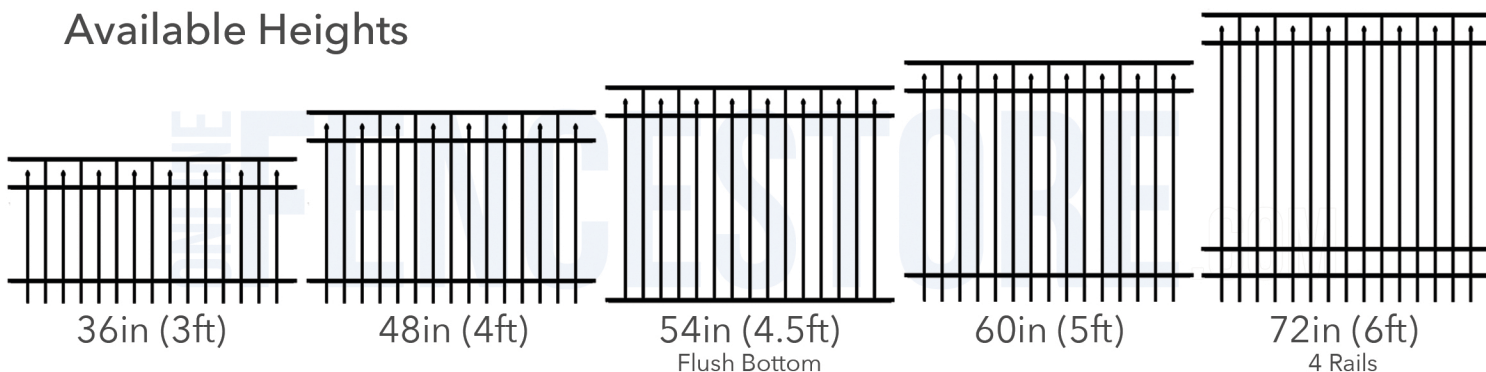

### Available Picket Spacing

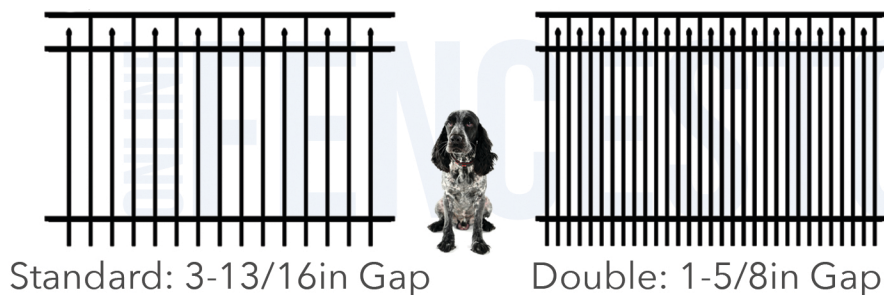

### Available Colors



Pressed Spear Point Top

### ICC Swimming Pool Code Approved Heights

#### Standard Picket Spacing

54in Flush Bottom, 60in, 72in

#### Double Picket Spacing

48in, 54in, 60in, 72in

Check local codes before purchasing.



### Panel Specifications

**Picket & Rail Material:** 6063-T5 Aluminum

**Coating:** AAMA 2604 Approved Polyester Powder Coat

**Pickets:** 5/8in Sq. x 0.050in Wall **Rails:** 1in Sq. x 0.055in Wall

**Screws:** 410 Hardened Stainless Steel With Cr6 Plating

Panels can rack 20in over the 6ft span for installations on hills.