





**Available Heights**

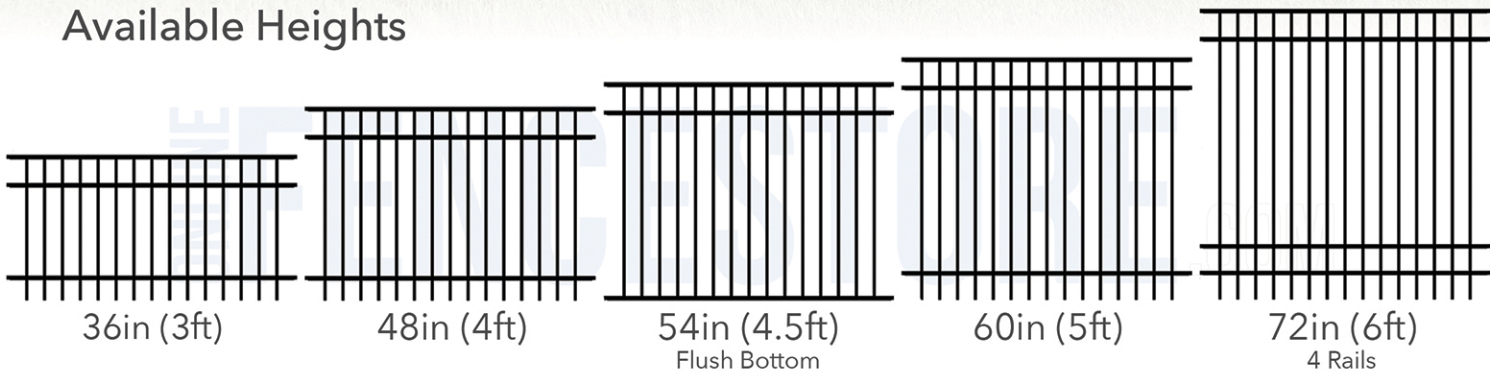

**Available Picket Spacing**

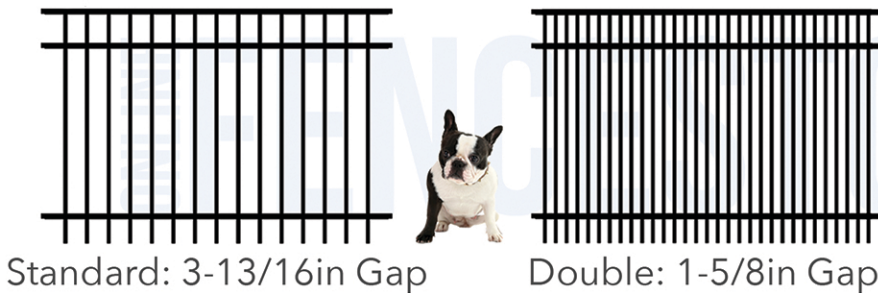

**Available Colors**



**ICC Swimming Pool Code Approved Heights**

**Standard Picket Spacing**  
 54in Flush Bottom, 60in, 72in  
**Double Picket Spacing**  
 48in, 54in, 60in, 72in  
 Check local codes before purchasing.



**Panel Specifications**

**Picket & Rail Material:** 6063-T5 Aluminum  
**Coating:** AAMA 2604 Approved Polyester Powder Coat  
**Pickets:** 5/8in Sq. x 0.050in Wall **Rails:** 1in Sq. x 0.055in Wall  
**Screws:** 410 Hardened Stainless Steel With Cr6 Plating  
 Panels can rack 20in over the 6ft span for installations on hills.